



锦霸工贸  
JINBA INDUSTRY-TRADE



National High-tech Enterprises



6" SR Series Traditional



**锦霸工贸**  
JINBA INDUSTRY-TRADE

# Product Introduction

**6" SR Series** POM for impeller, reinforced PC for cover plate and stainless steel for diffuser, greatly improving the wear resistance and sand resistance.




## · Performance characteristics:

1. High-grade Stainless steel for casing of motor and pump, shaft coupling, fastener, etc, elegant appearance, strong decay resistance, outstanding durability;
2. The motor is equipped with angular contact ball bearing at one end, bearing large axial force;
3. Shaft coupling and flange meet “NEMA” standard;
4. POM for impeller, reinforced PC for cover plate and stainless steel for diffuser, greatly improving the wear resistance and sand resistance;
5. High-density cast iron outlet and inlet, with electrophoretic treatment, attractive and practical, cost-effective;
6. Plug type cable joint, high insulation, high temperature resistance, to ensure the sealing, and easy to install.

## 6" SR Series material of spare parts

### MODEL ANALYSIS :

150 QJ 18 - 6

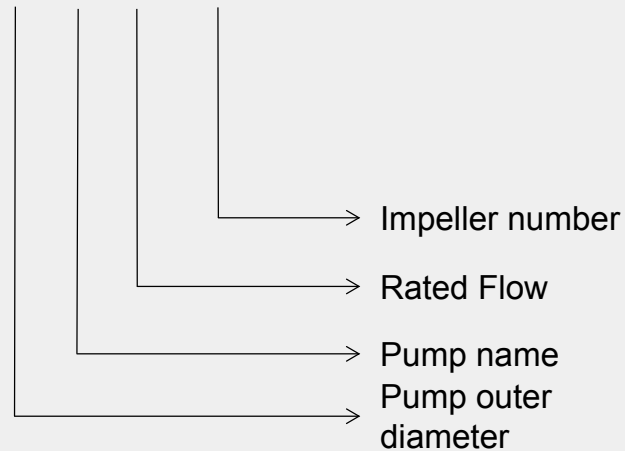

Part Name	Material	Part Name	Material
Pump Casing	304/201	Top bearing chock	HT200
Discharge Head/Outlet	HT200	Bottom bearing chock	HT200
Connector/Inlet	HT200	Mechanical Seal	Silicon carbide - graphite
Bowl	430	Rotator	304—45#Weld
Impeller	POM	Bearing	C&U
Coupling	304	Oil	Food-grade machine oil
Motor Casing	304/201	Bottom support	HT200

## 6SR18 TECHNICAL DATA


Item Number	Motor		Out diameter inch	Q=DELIVERY										
				m³/h	0	3	6	9	12	15	18	21	24	27
	HP	KW		L/min	0	50	100	150	200	250	300	350	400	450
150SR18-6	7.5	5.5	3"	HEAD (m)	87	84	81	77	72	61	55	45	33	19
150SR18-7	7.5	5.5			99	95	92	87	81	72	62	50	35	21
150SR18-9	10	7.5			130	125	121	115	107	96	83	66	48	28
150SR18-11	12.5	9.2			156	150	145	138	128	114	98	78	56	31
150SR18-13	15	11			188	177	175	166	154	138	119	96	70	40
150SR18-15	17.5	13			213	205	198	189	175	156	134	107	77	43
150SR18-18	20	15			260	249	241	230	213	191	164	132	96	55
150SR18-22	25	18.5			314	302	292	279	258	230	198	158	114	64
150SR18-26	30	22			374	360	348	332	308	275	237	190	138	79
150SR18-30	35	26			429	412	400	380	352	315	270	216	156	88

Note: Technical parameters are subject to change without notice.




锦霸工贸  
JINBA INDUSTRY-TRADE

# Parameter Center

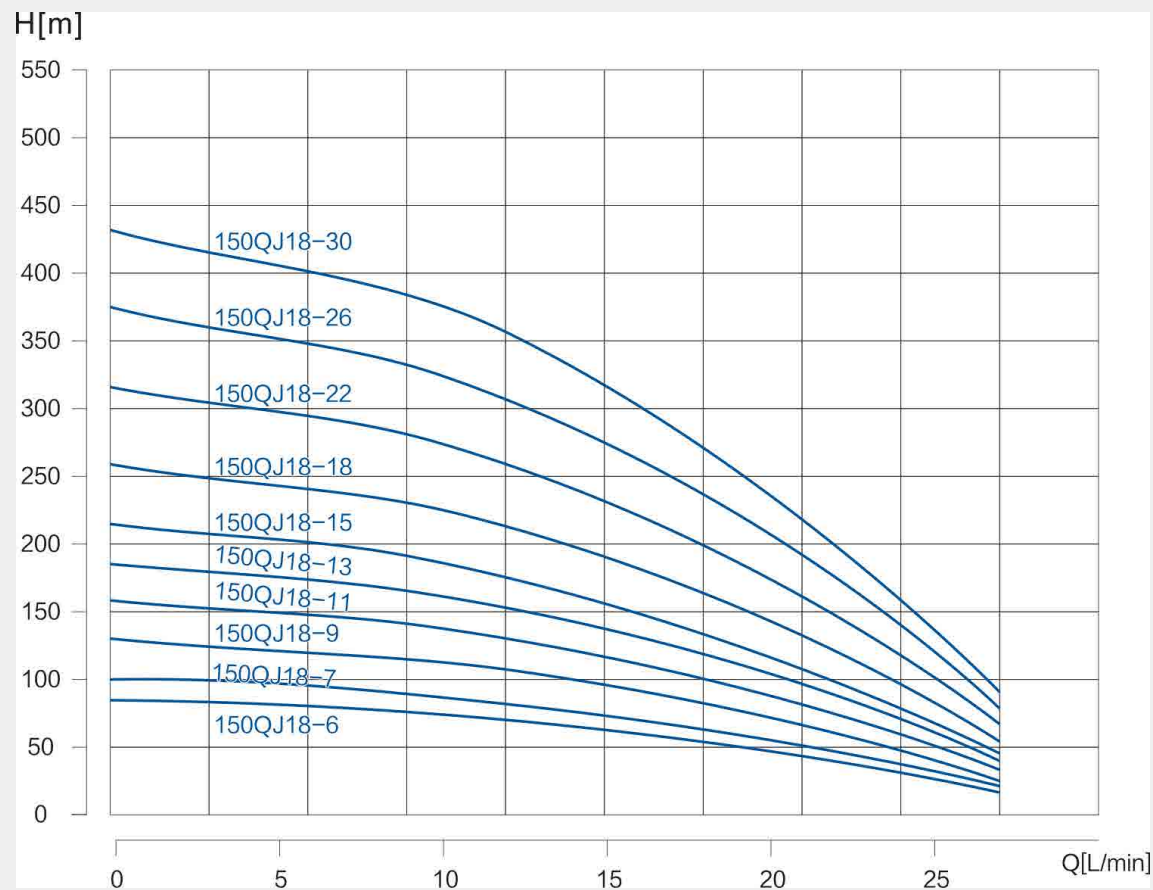

Performance Curve

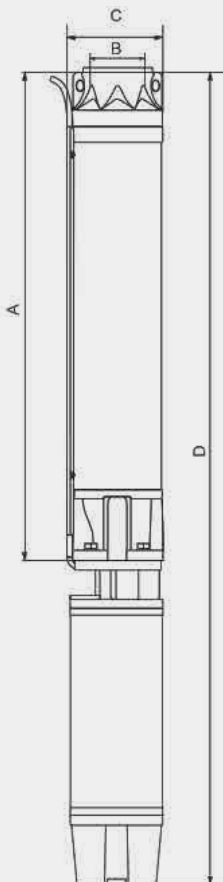

Pump Type	Size(mm)			
	A	B	C	D
150SR18-6	623	3"	144	1320
150SR18-7	668		144	1365
150SR18-9	761		144	1508
150SR18-11	852		144	1649
150SR18-13	1005		144	1852
150SR18-15	1097		144	1994
150SR18-18	1288		144	2245
150SR18-22	1525		144	2572
150SR18-26	1762		144	2904
150SR18-30	1946		144	3016



## 6SR30 TECHNICAL DATA

Item Number	Motor		Out diameter inch	Q=DELIVERY									
				m³/h	0	5	10	15	20	25	30	35	40
	HP	KW		L/min	0	83	166	250	333	416	500	583	666
150SR30-5	7.5	5.5	3"	HEAD (m)	72	68	64	59	53	45	35	23	10
150SR30-7	10	7.5			98	92	86	79	71	59	45	30	11
150SR30-8	10	7.5			115	109	102	94	84	71	55	37	14
150SR30-9	12.5	9.2			127	119	112	103	91	77	60	38	15
150SR30-11	15	11			158	149	140	129	115	97	75	50	21
150SR30-13	17.5	13			184	173	162	149	133	111	86	56	22
150SR30-15	20	15			215	203	190	176	157	132	103	68	28
150SR30-18	25	18.5			255	241	225	208	185	155	120	80	31
150SR30-21	30	22			301	284	266	245	219	184	143	95	39
150SR30-24	35	26			341	322	301	277	247	207	161	106	42


Note: Technical parameters are subject to change without notice.






锦霸工贸  
JINBA INDUSTRY-TRADE

# Parameter Center

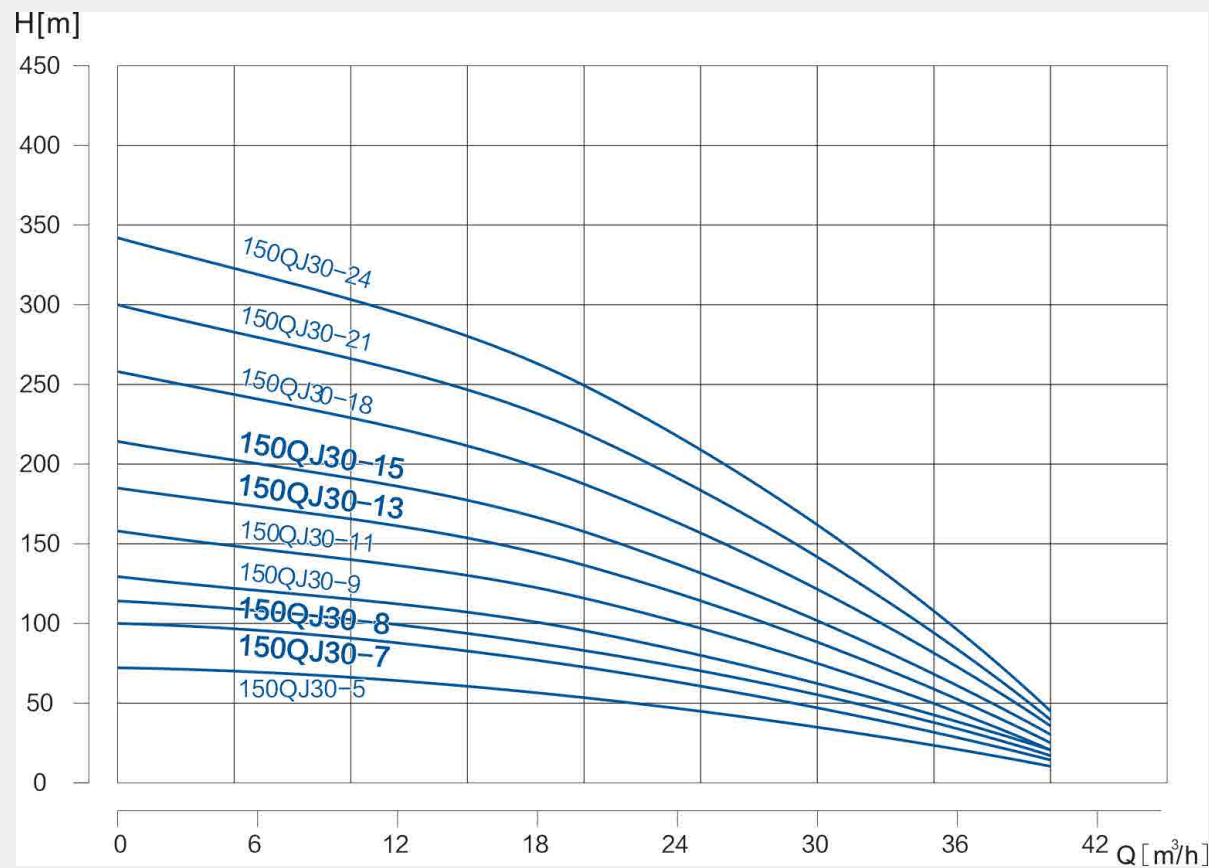

Performance Curve

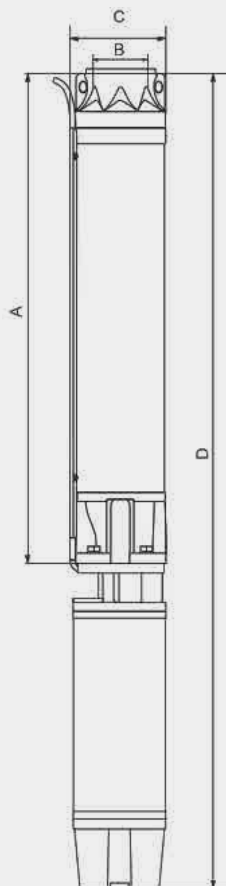

Pump Type	Size(mm)			
	A	B	C	D
150SR30-5	615	3"	144	1312
150SR30-7	721		144	1468
150SR30-8	780		144	1527
150SR30-9	830		144	1627
150SR30-11	934		144	1781
150SR30-13	1105		144	2002
150SR30-15	1215		144	2172
150SR30-18	1377		144	2424
150SR30-21	1592		144	2734
150SR30-24	1754		144	2824

## 6SR45 TECHNICAL DATA


Item Number	Motor		Out diameter inch	Q=DELIVERY											
				m³/h	0	6	12	18	24	30	36	42	48	54	60
	HP	KW		L/min	0	100	200	300	400	500	600	700	800	900	1000
150SR45-5	10	7.5	3"	HEAD (m)	79	74	69	64	60	55	51	45	39	31	22
150SR45-6	12.5	9.2			92	85	80	74	68	63	58	51	44	34	23
150SR45-7	15	11			111	103	96	89	83	77	71	63	54	43	30
150SR45-8	17.5	13			123	114	106	99	92	85	78	70	60	46	31
150SR45-9	20	15			142	132	123	114	106	99	90	81	69	55	39
150SR45-10	25	18.5			154	143	133	124	115	107	97	87	74	58	40
150SR45-11	25	18.5			173	161	150	139	130	121	110	99	84	67	47
150SR45-12	30	22			186	172	160	150	138	129	117	105	90	70	48
150SR45-13	30	22			204	190	177	165	153	142	130	116	100	79	55
150SR45-14	35	26			217	201	187	174	162	150	137	122	107	82	56
150SR45-15	35	26			236	219	204	190	177	164	150	134	112	91	64

Note: Technical parameters are subject to change without notice.




锦霸工贸  
JINBA INDUSTRY-TRADE

# Parameter Center

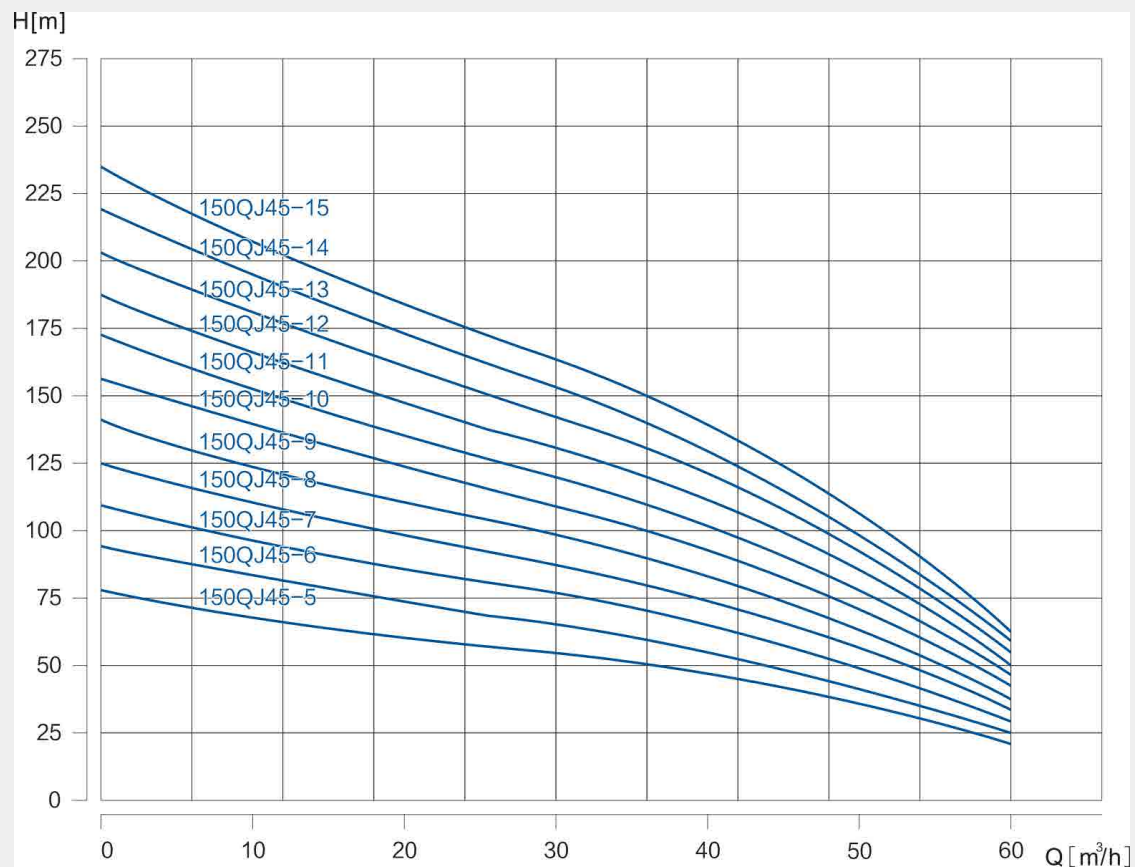

**Performance Curve**

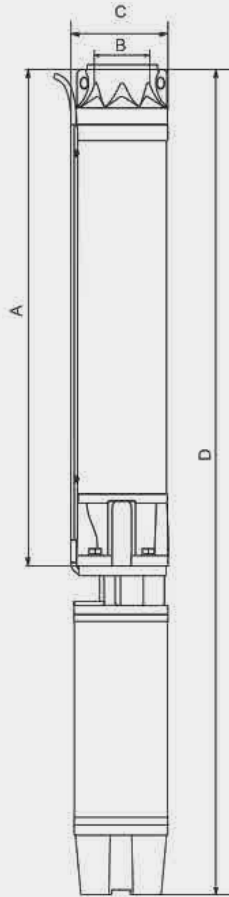

Pump Type	Size(mm)			
	A	B	C	D
150SR45-5	666	3"	144	1413
150SR45-6	732		144	1529
150SR45-7	798		144	1645
150SR45-8	864		144	1761
150SR45-9	930		144	1887
150SR45-10	996		144	2043
150SR45-11	1062		144	2109
150SR45-12	1128		144	2270
150SR45-13	1194		144	2336
150SR45-14	1313		144	2383
150SR45-15	1379		144	2449

# Mechanical Parameters



Animal Husbandry



High pressure water delivery



Building Industry



Mining



Agriculture



Dryland essential machine



Increase pressure



Industrial salt essential



锦霸工贸  
JINBA INDUSTRY-TRADE

# Parts List





Jinba Industry & Trade Co., Ltd, founded in 1998 (formerly known as Taizhou Jinba Industry & Trade Co., Ltd), is located in the town of water pump in wenling city zhejiang province, which is beautiful, wealthy and rapidly developed. Jinba is one of senior enterprises in the industry of deep well pump, a collection of research, development, manufacturing and sales, enjoying good reputation both at home and abroad.

Since 20 years ago, Jinba industry has entered the fast lane of high-speed development, accelerated the development pace of research and development, manufacturing and sales, and doubled the scale of assets. Facing the new domestic and foreign market environment and business situation, Jinba industry upholds corporate social responsibility, opening a new chapter of “High efficient, energy saving technology, leading the new era of the deep well pump”.





**锦霸工贸**  
JINBA INDUSTRY-TRADE

# Manufacturing Strength





## E-MAIL

[jinba@cn-jinba.com](mailto:jinba@cn-jinba.com)   [sales@cn-jinba.com](mailto:sales@cn-jinba.com)   [sales@jinbapump.com](mailto:sales@jinbapump.com)

## PHONE

0576-89977567   0576-89977560

## FAX

0576-86382389

## ADD

SHANGTANTOU INDUSTRIAL PARK,DAXI TOWN,WENLING  
CITY,ZHEJIANG PROVINCE,CHINA